



TEE JUNCTION SCHEDULE


REINFORCEMENT

REFER DETAIL

	DN1	DN2	L1	L2	T1	W1	T2	DB	DW	DT
	1350	750						270	270	
	1050	750						270	270	
	750	600								
	750	150	1000	800	4.5	63				
	750	150	1000	800	4.5	63				
	750	750	1500	750			25	440	440	210
	600	300	1500	600	4.5	112				
	600	600	1500	600			25	290	290	160
	600	450	1500	600	4.5	254				
	600	450	1500	600	4.5	254				







REINFORCEMENT

REFER DETAIL


TEE JUNCTION - TYPE 2

CROTCH FLATE/ WRAFFER REINI ORCEPIENT

CROTCH PLATE/ WRAPPER REINFORCEMENT SCHEDULE							
JUNCTION TYPE	ANGLE	T1	W1	T2	DB	DW	DT
DN750 x DN750 TEE	90°			25	440	440	210
DN750 x DN600 TEE	90°			25	240	240	180
DN600 x DN600 TEE	90°			25	290	290	160
DN600 x DN450 WYE	45°			25	185	232	140
DN600 x DN450 TEE	90°	4.5	254				
DN600 x DN300 TEE	90°	4.5	112				

NOTES:

- 1. ALL STEEL USED FOR COLLARS SHALL BE IN ACCORDANCE WITH AS.3678.
- ALL WELDED JOINTS TO BE MECHANICAL WIRE BRUSH CLEANED AND COATED WITH INORGANIC ZINC SULFATE PRIMER (MINIMUM 75 MICRONS).
- ALL WELDS TO BE CONTINUOUS FULL WELD ALL ROUND TO MAIN PIPE AND BRANCH IN ACCORDANCE WITH AS.1554.1 CATEGORY SP UNLESS NOTED OTHERWISE.
- 4. TEST HOLES ARE PROVIDED TO ENABLE GAP UNDER COLLARS TO BE PRESSURISED TO CONFIRM COMPLETE WELDING INTEGRITY, HOLES SHALL BE PLUGGED WITH A SOCKET HEAD PLUG WITH TAPER THREAD UPON COMPLETION.
- FIELD MORTAR CEMENT LINING TO BE REINSTALLED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATION.
- 6. ALL MAIN FLANGES TO BE RAISED FACE TYPE COMPLYING WITH AS.4087 FIGURE B7.
- ALL FITTINGS TO BE ASSEMBLED IN THE FACTORY AND NOT ON SITE. FBPE COATING TO BE APPLIED AFTER FABRICATION.
- PIPE DIAMETERS & WALL THICKNESS FOR FABRICATED FITTING TO BE AS FOLLOWS: DN150 - 168 OD x 5.0mm, DN300 - 356 OD x 5.0mm, DN450 - 508 OD x 6.0mm, DN600 - 660 OD x 6.0mm, DN750 - 813 OD x 7.0mm.
- ALL MATERIAL AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE RELEVANT STANDARDS AUSTRALIAN CODES, EXCEPT WHERE VARIED BY THE PROJECT SPECIFICATION.
- 10. 4 PART PETROLATUM TAPE SYSTEM TO BE SUITABLE FOR BELOW GROUND TROPICAL CLIMATE INSTALLATION: PRIMER, MASTIC FILLER, TAPE & PVC OVER WRAP TAPE.

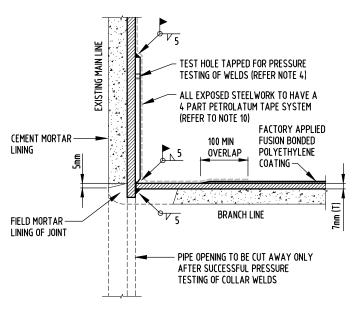



1	REDRAWN ON CAD. GENERAL AMENDMENTS 2021.	PW	JUNE'21	IL	DC			
NO	DESCRIPTION	DRN	DATE	CKD	APPD			
	AMENDMENTS							

TEE JUNCTION - TYPE 1



	DES	NDARD DRAWING									
	DRN	PW	MA	INIL A VINIC							
	CHK	IL		MAINLAYING STANDARD WELDED STEEL PIPE							
	APPD	DC	STA								
	SCALE	E N.T.S. REINFORCEMENT									
	ISSUED	JUN'21	А3	DRAWING	W1-2-06B	1					
	ALL DIM. IN mm		AS	NUMBER	W 1-2-00D	'					
DRAFTING STANDARD TO A.S.1100			.S.1100	CAD PRODUCT - DO NOT AMEND MANUALLY							