

WEDGE LINKS, TINNED COPPER WITH BRASS LOCKING SCREWS ALM TYPE WL400 OR SIMILAR ITEM NUMBER: 10892

2 OFF 5mm BRAMITE BRACE PLATE EACH FIXED TO TOP PLATE & CHASSIS WITH 3 C/SINK SCREWS


REBATED JOINT USING EPOXY TYPE HARD SETTING ADHESIVE SECURED WITH SELF TAPPING SCREWS

CHASSIS- INSULATING PANEL - BRAMITE SHEET ITEM NUMBER: 9084

NEUTRAL BUSBAR 50 X 6mm TINNED COPPER

DRILL 25DIA HOLE THRU CENTRE PHASE OF PANEL TO ACCEPT TINNED COPPER CYLINDRICAL SPACER 1 OFF 25 OD X 14 ID X 1LG

LINK PANEL DISTRIBUTION
ITEM NUMBER 3491

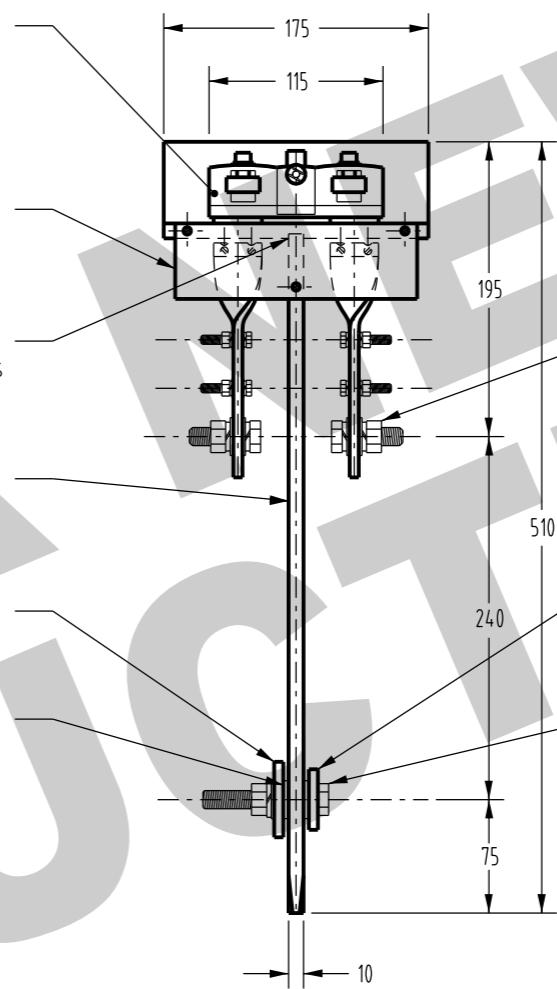

6 OFF M12 X 40 LG S/S BOLTS CW NUTS, S/S SPRING WASHERS & CAD PLATED FLAT WASHERS - REFER NOTE 4

NEUTRAL BUSBAR 40 X 6 TINNED COPPER

3 OFF M12 X 60 LG S/S BOLTS CW NUTS, S/S SPRING WASHERS & CAD PLATED FLAT WASHERS - REFER NOTE 4

NEUTRAL BUSBAR KIT (SEE NOTE 5)

C/W 8xM16 BOLT ASSEMBLIES AND SPACER WASHERS
ITEM NUMBER 504228

NOTES:

1. PANEL WITH LINKS.
2. BI METAL LUGS TO BE USED FOR TERMINATING ALUMINIUM CABLES.
3. FOR DETAILS PF PANEL INSTALLATION REFER DRAWING NO S02-02-03-03.DGN.
4. FLAT WASHERS TO BE CAD PLATED STEEL, EXTRA LARGE AS PER AS 1237 TABLE 1.
5. NEUTRAL BUSBAR SHALL BE USED FOR REPLACING NEUTRAL BUSBAR ON MAINS SIDE TO PROVIDE ADDITIONAL NEUTRAL CONNECTIONS

NO	DESCRIPTION	DRN	DATE	CKD	APPD
13	NOT FOR NEW CONSTRUCTION REFORMATTED TEXT. ADDED SHEET PANEL ITEM NUMBER. CHANGED 'STOCK CODE' TO 'ITEM NUMBER' ISSUED FOR CONSTRUCTION	A.N.	AUG'21	A.N.	B.V.
12	BAKELITE CHANGED TO BRAMITE, SC ADDED FOR LINKS	C.C.	OCT'18	B.V.	B.V.
11	MAINS BOLTS REDUCED TO 40 LONG, DIMENSIONS 265 & 170 NOW 240 & 195, & RGI APR'01 J.G. FRR 5mm BAKELITE BRACE PLATES ADDED.	RGI	FEB'05	C.C.	C.C.
10		x	APR'01	J.G.	FRR
9	CENTRE PHASE SPACER NOW TINNED COPPER.	x	JUL'93	x	CMCK
AMENDMENTS					

PowerWater
NORTHERN TERRITORY

DES	J.HASSANEN	POWER STANDARD DRAWING	
DRN	R.HAIGH	DISTRIBUTION PILLARS RESIDENTIAL TYPE PANEL - LINK	
CKD	G.McSHANAG		
APPD			
SCALE	FEBRUARY 1986	A3	DRAWING NUMBER S02-01-03-04
ISSUED	NOT TO SCALE		
ALL DIM. IN mm		CAD PRODUCT - DO NOT AMEND MANUALLY	
DRAFTING STANDARD TO A.S.1100			